


Displays for EVC-D and EVC-E engines.



2,5" display
One engine can be displayed

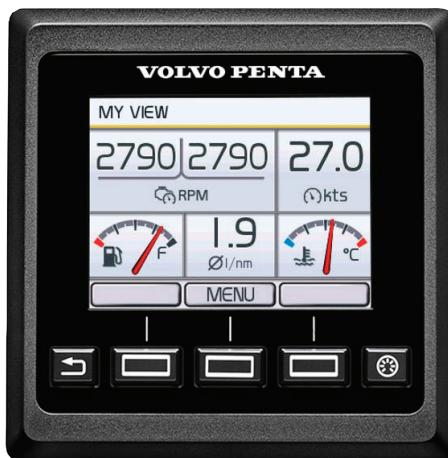

4" display
Two engines can be displayed



7" display
Three engines can be displayed

Features and Data	2.5"	4"	7"
Color screen		x	x
Day/Night mode		x	x
Pop-up menus (shortcuts)		x	x
Neutral beep (on/off)	x	x	x
Engines displayed (max)	1	2	3
Engine rpm	x	x	x
Engine hours	x	x	x
Exhaust temperature, dry			x

Features and Data	2.5"	4"	7"
Coolant temperature	x	x	x
Coolant pressure 5)			x
Voltage	x	x	x
Oil pressure	x	x	x
Oil temperature			x
Turbo pressure (diesel)	x	x	x
Alarms and warnings	x	x	x
Diagnostics in text	x	x	x
Diagnostics in text, extended info	x	x	x
Transmission, oil pressure *	x	x	x
Transmission, oil temperature *	x	x	x
Boat speed 1)	x	x	x
Fuel level 2)	x	x	x
Fuel feed pressure			x
Fresh water level 2)	x	x	x
Depth with alarm 2)	x	x	x
Sea water temperature 2)	x	x	x
Sea water pressure 5)			x
Rudder angle 2)	x	x	x
Powertrim angle (Aquamatic)	x	x	x
Interceptor position		x	x
Active Corrosion Protection info 3)	x	x	x
Low-speed mode, slip rate 4)	x	x	x
Triple & Quadruple support	x		x

With Trip Computer software (option):

Instant fuel rate	x	x	x
Trip fuel	x	x	x
Average fuel rate	x	x	x
Total fuel rate	x	x	x
Time to empty	x	x	x
Instant fuel economy 1)	x	x	x
Average fuel economy 1)	x	x	x
Trip fuel economy 1)	x	x	x
Trip distance 1)	x	x	x
Trip time	x	x	x
Distance to empty 1)	x	x	x

With Dynamic Positioning System (option):

Bearing	x
Direction of movement	x
GPS signal strength	x

1) Requires extra sensor or NMEA.

2) Requires extra sensor.

3) Volvo Penta IPS. Requires Active Corrosion Protection.

4) Requires Low-speed mode.

5) IPS alarms only.

* Depending on transmission. Requires sensors.